





<b>Body finish</b>	Lacquered red	Spring green
	Corn yellow	Matt white
	Matt black	Baby blue
	Concrete grey	
	<b>CRI and CCT</b>	
	CRI85 2700K CRI85 4000K	CRI85 3000K <sup>(1)</sup>
	<b>Nominal Output</b>	
420 lm		
<b>Power</b>		
4,5W		
<b>Ingress Protection Rating</b>		
IP40		
<b>Insulation Class</b>		
Class I - Earth Connexion		
<b>Energetic Class</b>		
Energy Class A		
<b>Flammable surfaces</b>		
Can be installed on normally flammable surfaces (90°)		
<b>Distribution</b>		
Diffused		
<b>Controls options</b>		
Regulation with phase-cutting dimmer IGBT (C)		
<b>Weight</b>		
0.15 kg		



(1) Base version without designated code.


**Notes** The image of each product has a representative purpose

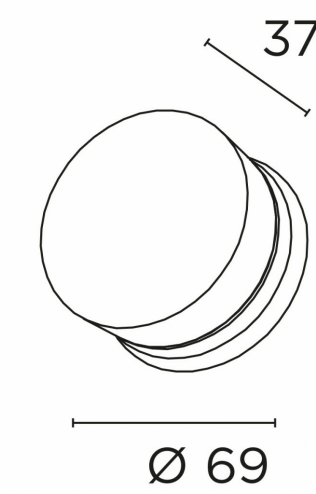

**Product description**

Round LED wall-mounted luminaire whose metal body is available in seven liquid-painted finishes and is fitted with an opal methacrylate diffuser for a diffused, omnidirectional light distribution. Available in 3000K, CRI85 as standard. Also available in 4000K upon request. Ingress protection of IP40.

Photometric information

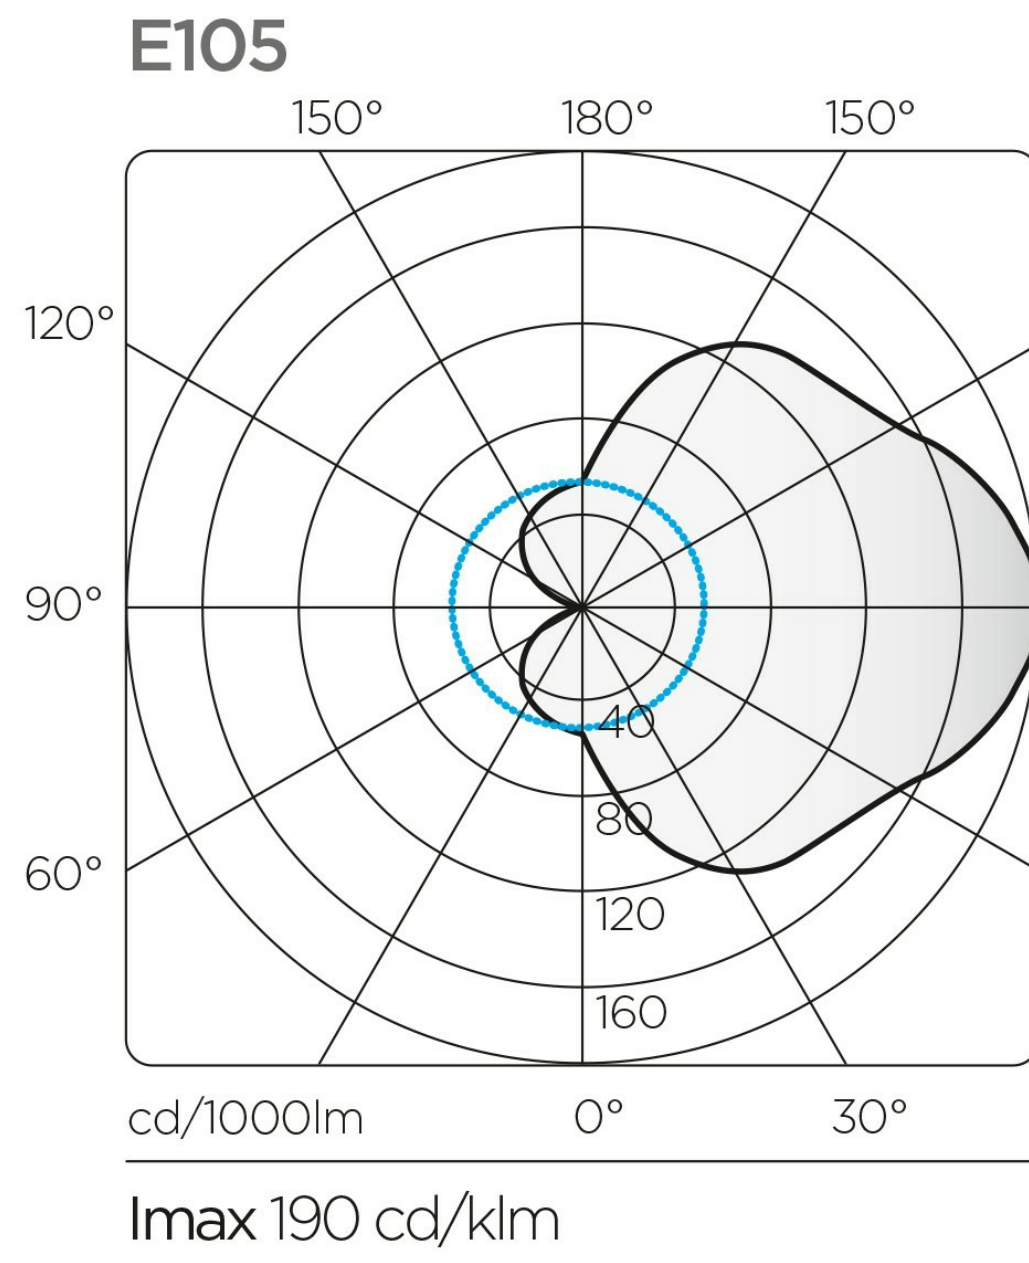

**MUFFIN**

POWER	4,5W
SOURCE CONSUPTION	4,5W
CRI	85
CCT (K)	3000
NOMINAL FLUX (lm)	420
FIXTURE FLUX (lm)	344
EFFICIENCY (lm/W)	76,4