

PLURIEL PLUS

PLURIEL PLUS_wall



PLURIEL PLUS

***to be completed with optic and ring_
high efficiency COB LED source_***

LED wall or ceiling luminaire with a single adjustable spotlight with proprietary joint allowing for 350° horizontal and +90°/-90° vertical adjustment. The body is manufac-

tured from die-cast aluminium alloy 6060 with heat dissipating function. Wall fixings with nylon plugs. Optics available in Spot, Medium and Large. Optics come complete

with a decorative ring that is available in seven liquid-coated finish options. The luminaire is available in matt white, matt black and concrete grey. Ingress protection of IP20.

INFO

Power

spot 13W

Source

COB LED

Built to last

Lumen maintenance of 100,000 hrs at L80B10.

Colour and Colour Temperature

CRI 85 - 3000K / CRI 95 - 2700K

CRI 95 - 3000K / CRI 95 - 4000K

Control


ON-OFF / DALI / PUSH / 1-10V

Body finish

○ ● ●

Ring finish


● ● ● ● ○ ● ●



Spot

Medium

Large

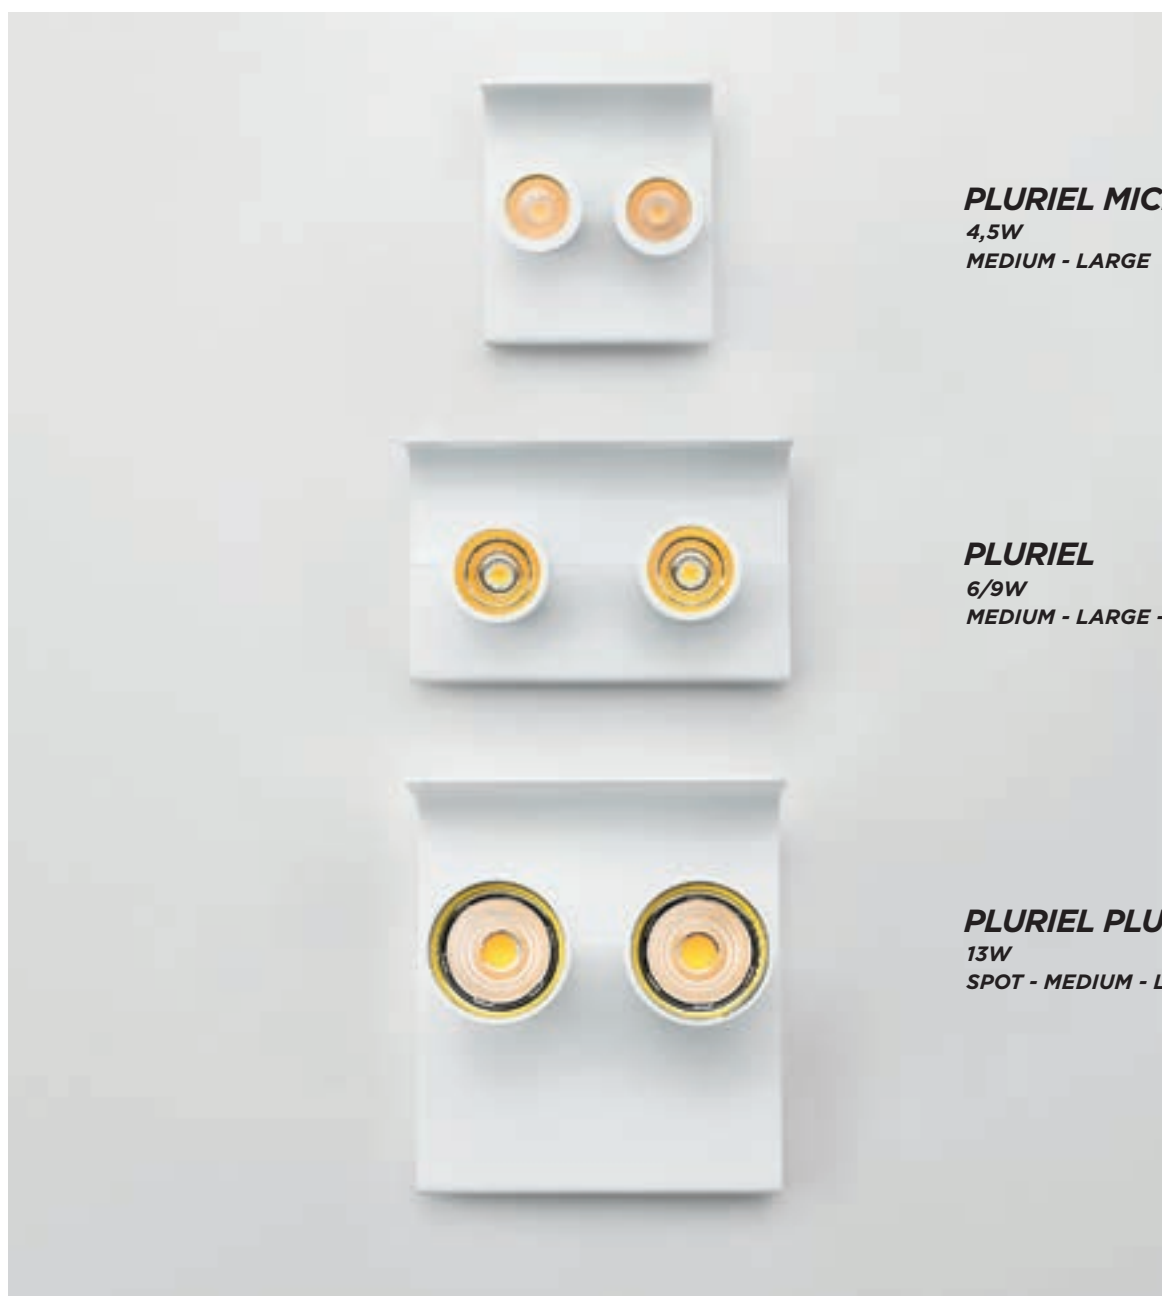

PLURIEL MICRO

4,5W

MEDIUM - LARGE

PLURIEL

6/9W

MEDIUM - LARGE - WIDE

PLURIEL PLUS

13W

SPOT - MEDIUM - LARGE


PLURIEL PLUS

PLURIEL PLUS_wall





PLURIEL PLUS



PLURIEL PLUS_wall




Product configurator

364 + Ring - Optic


Code Version Control Finish CRI - CCT*

* For the version CRI 85 - 3000K it is not necessary to fill in the field.



PLURIEL PLUS 1x

Code	Version	Kg	Control	Finish	CRI - CCT
364	40	1x13W 0,80	50 ON-OFF	42 ○ matt white	- 85 - 3000K
				52 ● matt black	/9527 95 - 2700K
				92 ● concrete grey	/9530 95 - 3000K
					/9540 95 - 4000K



PLURIEL PLUS 2x

Code	Version	Kg	Control	Finish	CRI - CCT
364	41	2x13W 0,80	50 ON-OFF	42 ○ matt white	- 85 - 3000K
			61 1-10V	52 ● matt black	/9527 95 - 2700K
			65 DALI	92 ● concrete grey	/9530 95 - 3000K
			68 PUSH		/9540 95 - 4000K

+


Ring - Optic

Code	Ring finish	Optic
610 90 50	10 ● lacquered red	/S Spot 21°
	17 ● matt orange	/M Medium 28°
	20 ● spring green	/L Large 38°
	33 ● corn yellow	
	42 ○ matt white	
	52 ● matt black	
	92 ● concrete grey	




Rings with optics included


PLURIEL PLUS _{accessories}




With the Narrow optic it is possible to obtain a 10° narrow beam.
Optic assembly and its coloured ring should not be ordered with this accessory.



Thanks to this accessory it is possible to obtain a narrow and sharp beam, with a strong contrast between the illuminated and unlit area.




Thanks to this accessory it is possible to obtain an asymmetrically narrower and sharper beam with a greater contrast between the illuminated and non-illuminated area.



The honeycomb grid is an accessory used for the anti-glare effect. It reduces the luminous flux by 20%.

IP₄₀ \overline{P}_{750°



The satin diffuser increases the diffusion of the luminous flux by widening and softening the beam of light.

IP₄₀ \overline{P}_{750°

Optic Narrow

Code

9G 312 52

Cut-Off

Code

9G 040

Visor

Code

9G 039

Honeycomb louvre


Code

9G 025


Satin diffuser

Code


9G 026



h (m)	Ø	Em (lux/klm)
h1	0,52	2467
h2	1,04	617
h3	1,57	274
h4	2,09	154
h5	2,61	99



h (m)	Ø	Em (lux/klm)
h1	0,87	1490
h2	1,74	372
h3	2,61	166
h4	3,48	93
h5	4,35	60



h (m)	Ø	Em (lux/klm)
h1	1,00	1310
h2	2,00	327
h3	3,01	146
h4	4,01	82
h5	5,01	52

PLURIEL PLUS

Power	Source consumption	CRI - CCT	N. output	Optic		Deliv. output	Efficacy
13W	12,1W	85 - 3000K	1679 lm	Spot	21°	E112 1484 lm	123 lm/W
				Medium	28°	E113 1487 lm	123 lm/W
				Large	38°	E114 1491 lm	123 lm/W
95 - 2700K	1294 lm	85 - 2700K	1294 lm	Spot	21°	E112 1144 lm	95 lm/W
				Medium	28°	E113 1146 lm	95 lm/W
				Large	38°	E114 1149 lm	95 lm/W
95 - 3000K	1361 lm	85 - 3000K	1361 lm	Spot	21°	E112 1202 lm	99 lm/W
				Medium	28°	E113 1205 lm	100 lm/W
				Large	38°	E114 1208 lm	100 lm/W
95 - 4000K	1638 lm	85 - 4000K	1638 lm	Spot	21°	E112 1447 lm	120 lm/W
				Medium	28°	E113 1450 lm	120 lm/W
				Large	38°	E114 1459 lm	120 lm/W