



Control options

- ON-OFF
- DALI
- 1..10V
- PUSH

Body finish

- Brick red
- Matt black
- Matt white
- Concrete grey

CRI and CCT

- CRI85 2700K
- CRI85 4000K
- CRI85 3000K ⁽¹⁾

Nominal Output

1750 lm

Power

14W

Ingress Protection Rating

IP44

Insulation Class

Class I - Earth Connexion

Energetic Class

Energy Class A+

Flammable surfaces

Can be installed on normally flammable surfaces (90°)

Distribution

Direct/Indirect


Weight

2.1 kg

⁽¹⁾ Base version without designated code.

Notes


The image of each product has a representative purpose



Product description

LED wall-mounted luminaire manufactured from extruded aluminium 6060 alloy and fitted with a PMMA diffuser and an extruded lens for direct/indirect light distribution. Available in four powder-coated finishes. Supplied in 3000K, CRI85 as standard. Also available in 2700K, 4000K. DALI, PUSH and 1-10V dimming options upon request. Ingress protection of IP44.

Photometric information

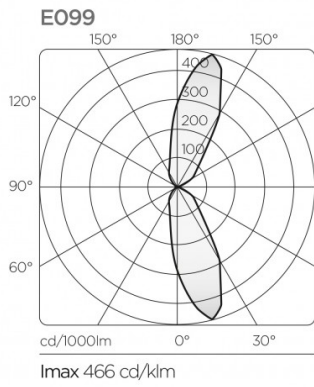

LINO

POWER	14W	28W	42W
SOURCE CONSUPTION	13,3W	26,6W	39,9W
CRI	85	85	85
CCT (K)	3000	3000	3000
NOMINAL FLUX (lm)	1750	3500	5300
FIXTURE FLUX (lm)	742	2023	2957
EFFICIENCY (lm/W)	55,7	76,1	74,1