


MUSEO REVO IP67 PICCHETTO DRIVER REMOTO


CODE 841-4A--- 48V
CODE 841-4B--- CC

LED			IP67		IK8
-----	--	--	------	--	-----


MINI
CODE 84104A
CODE 84104B

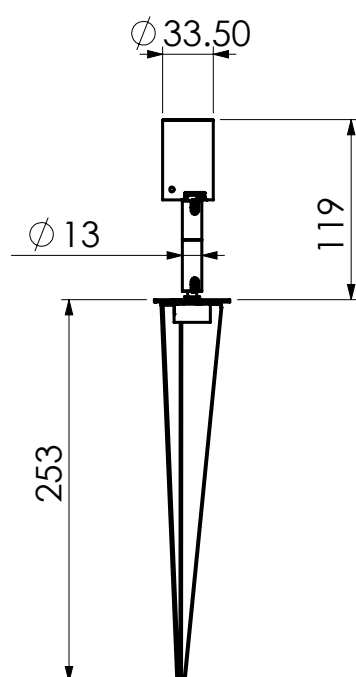


SMALL
CODE 84114A
CODE 84114B

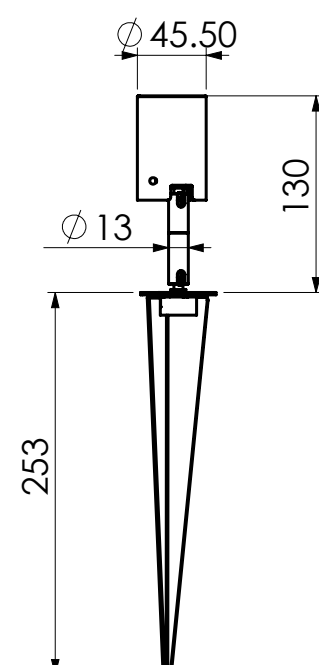





MEDIUM
CODE 84124A
CODE 84124B

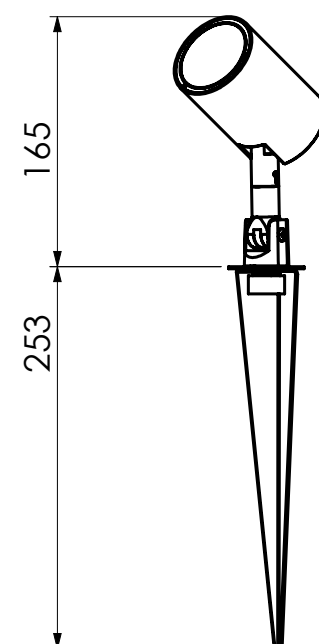



COMPACT
CODE 84134A
CODE 84134B

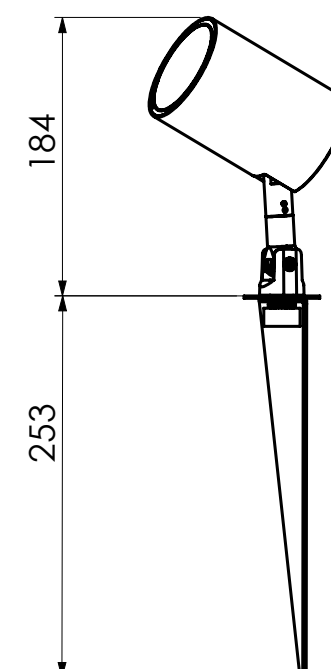

MAX
CODE 84144A
CODE 84144B

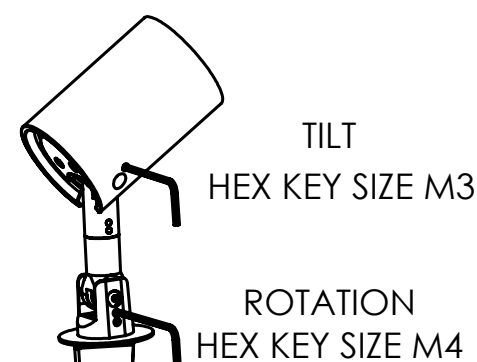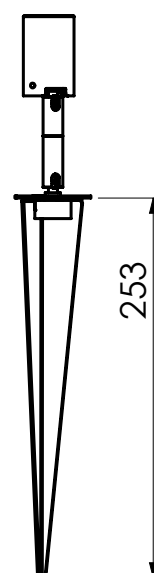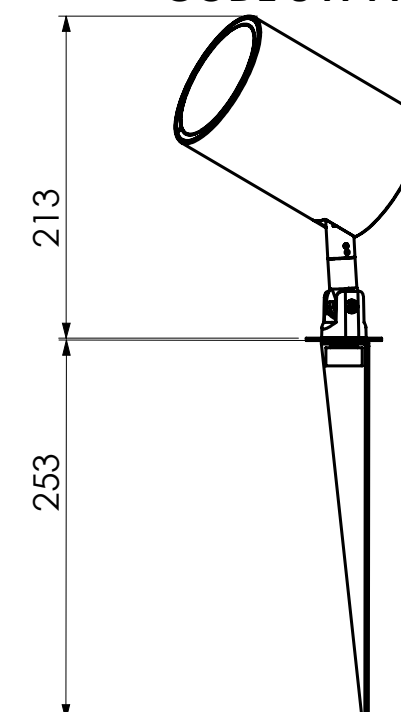

BLOCCARE REGOLAZIONE "TILT" E "ROTAZIONE"
DOPO IL POSIZIONAMENTO
LOCK "TILT" AND "ROTATION" ADJUSTMENTS WHEN POSITIONED

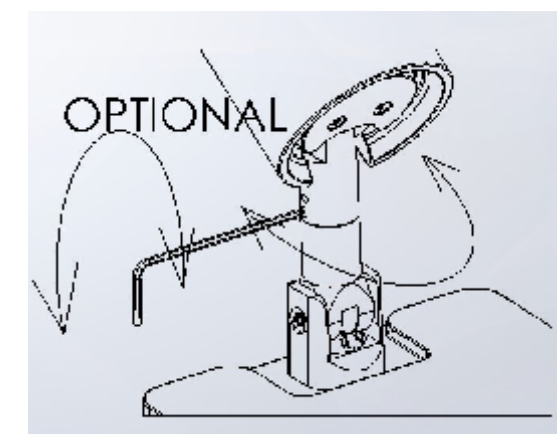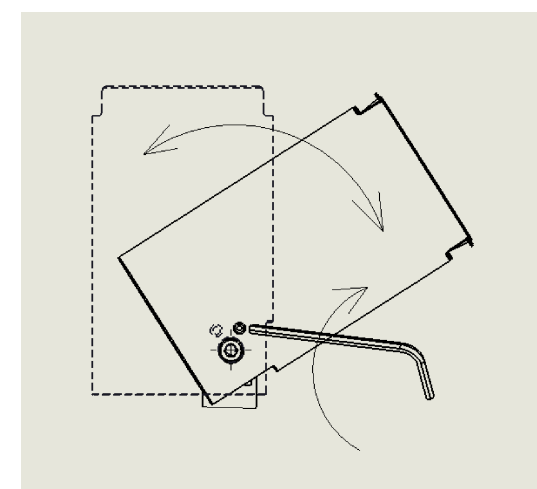

LED		48V			
-----	--	-----	---	---	--




EXAMPLE (MINI)

CODE 841-4A--- 48V
CODE 841-4B--- CC



~~230V~~


> IP 68




Cod.9G065
NOT INCLUDED

1


ON/OFF

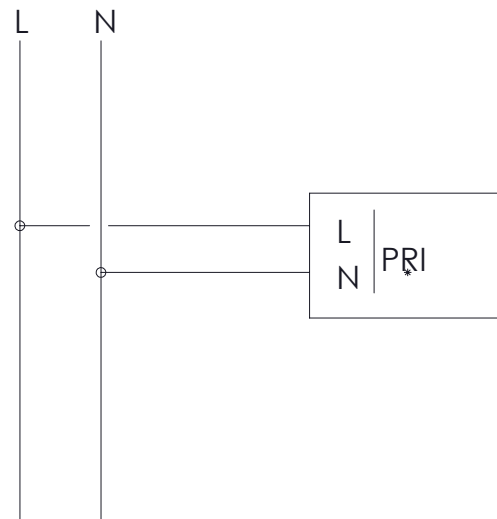

DALI (MIN.1,5mm²)

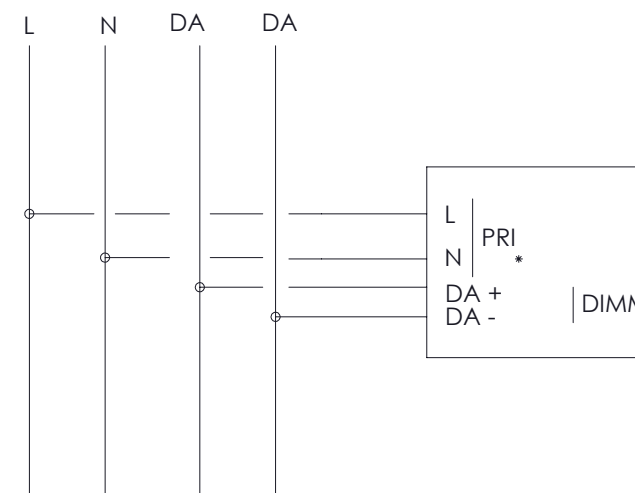

CABLES

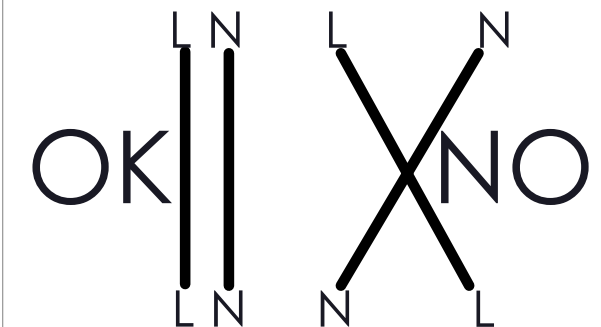

ART.9G109 SNOOT MINI
ART.9G111 SNOOT SMALL
ART.9G113 SNOOT MEDIUM
ART.9G115 SNOOT COMPACT
ART.9G117 SNOOT MAX



SNOOT


ART.9G110 VISOR MINI
ART.9G112 VISOR SMALL
ART.9G114 VISOR MEDIUM
ART.9G116 VISOR COMPACT
ART.9G118 VISOR MAX





VISOR





HONEYCOMB
(ONLY FROM FACTORY)





ELLIPSE
(ONLY FROM FACTORY)

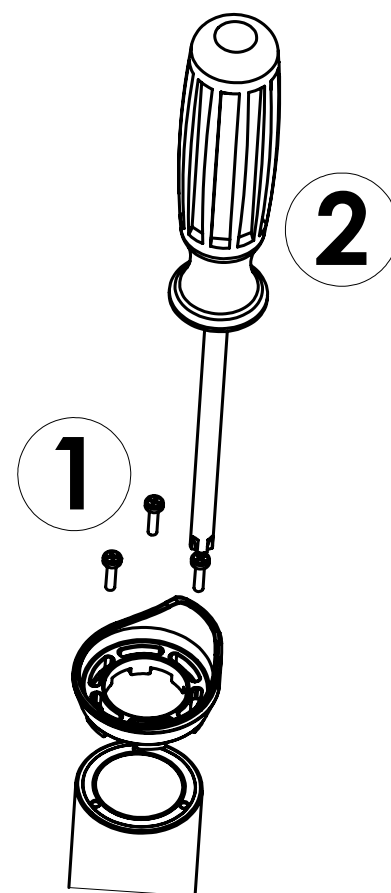

MAGNET INCLUDED

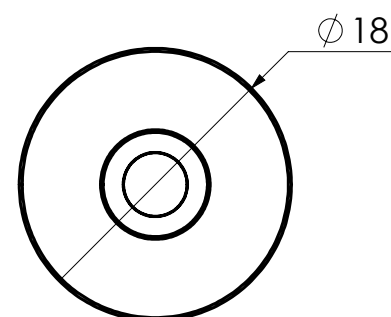


ELLIPTIC BEAM
ORIENTATION



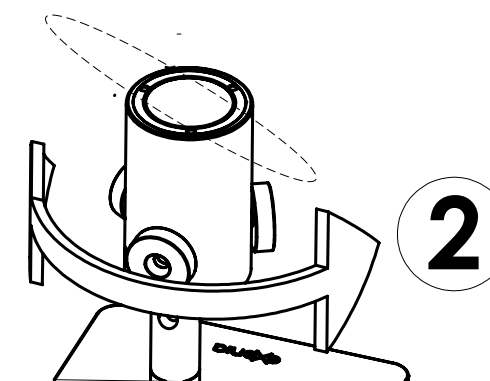



EXAMPLE (MINI)

PROTECTION

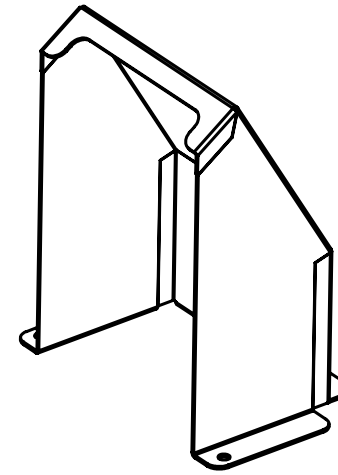

EXAMPLE (MINI)

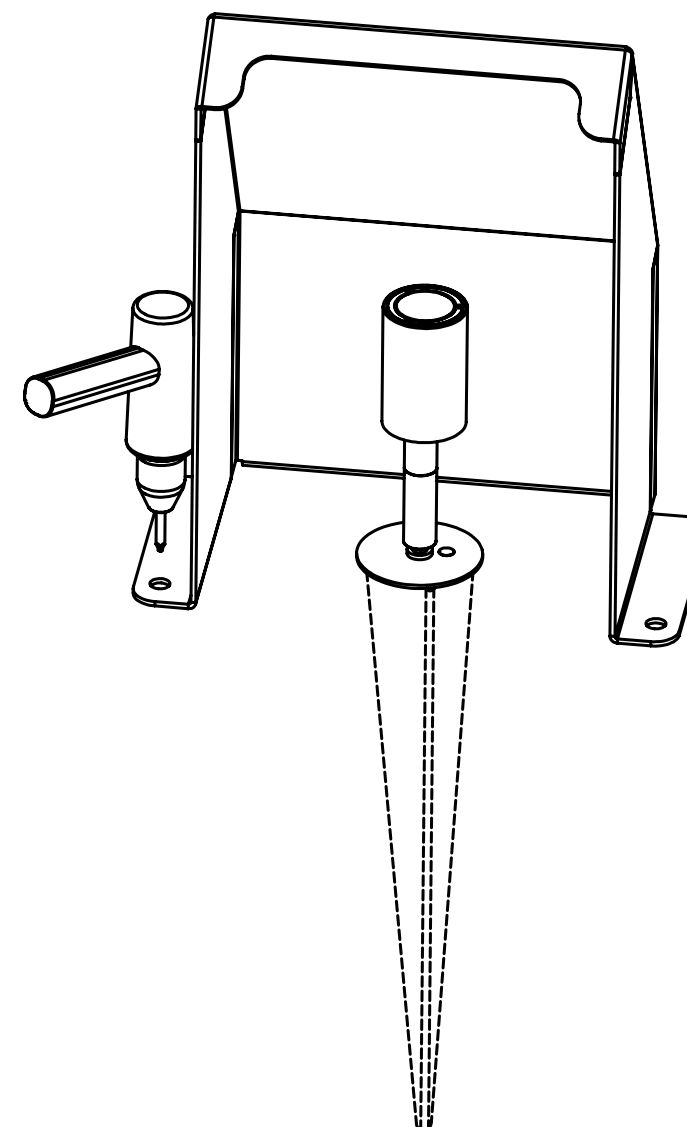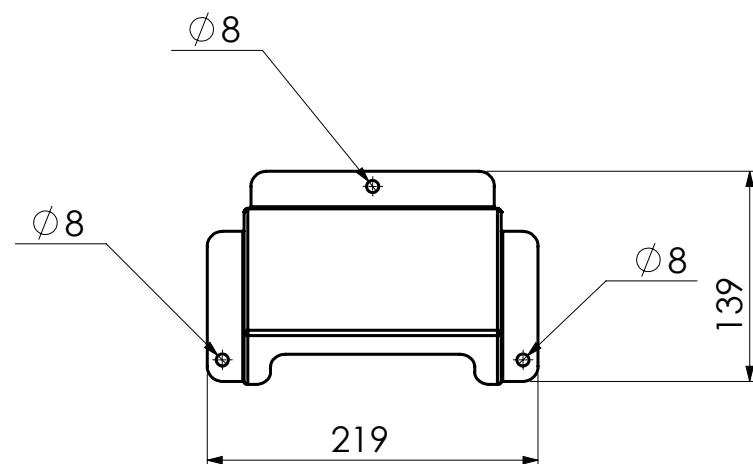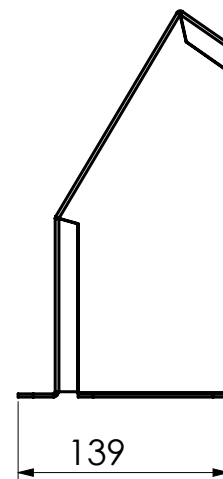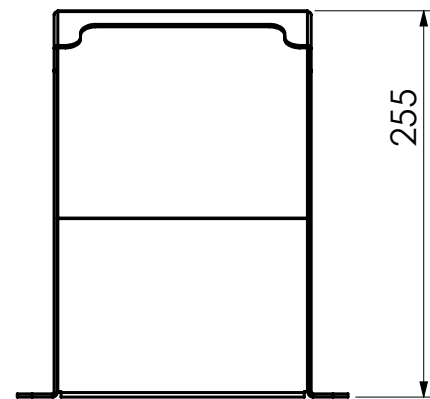


DEEP WASHER MEDIUM-COMPACT-MAX


TOP SIDE

H

40°

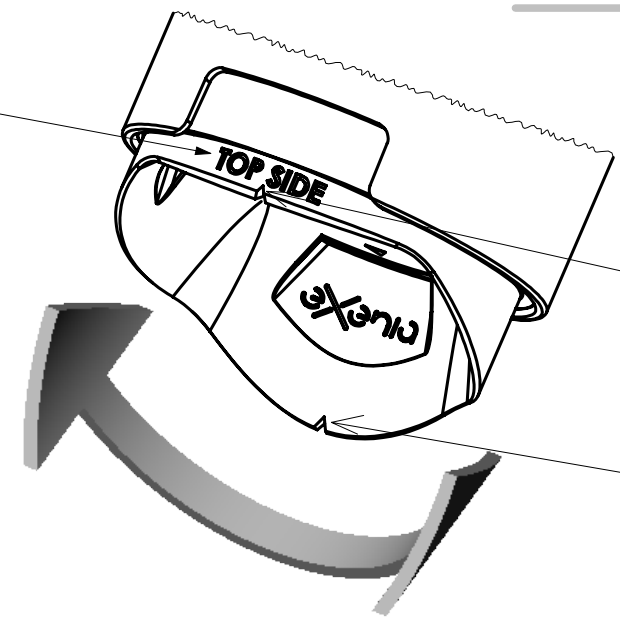

VERTICAL

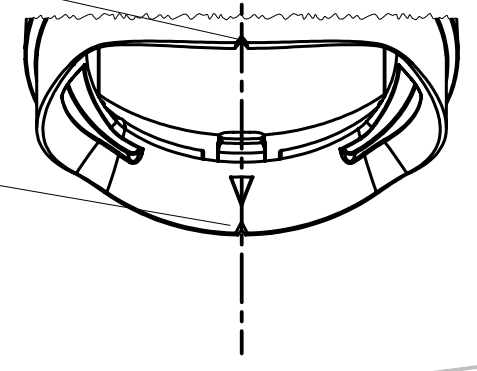



H

A

B

Hx0,3 Ax1,3

B




A

B

B

H

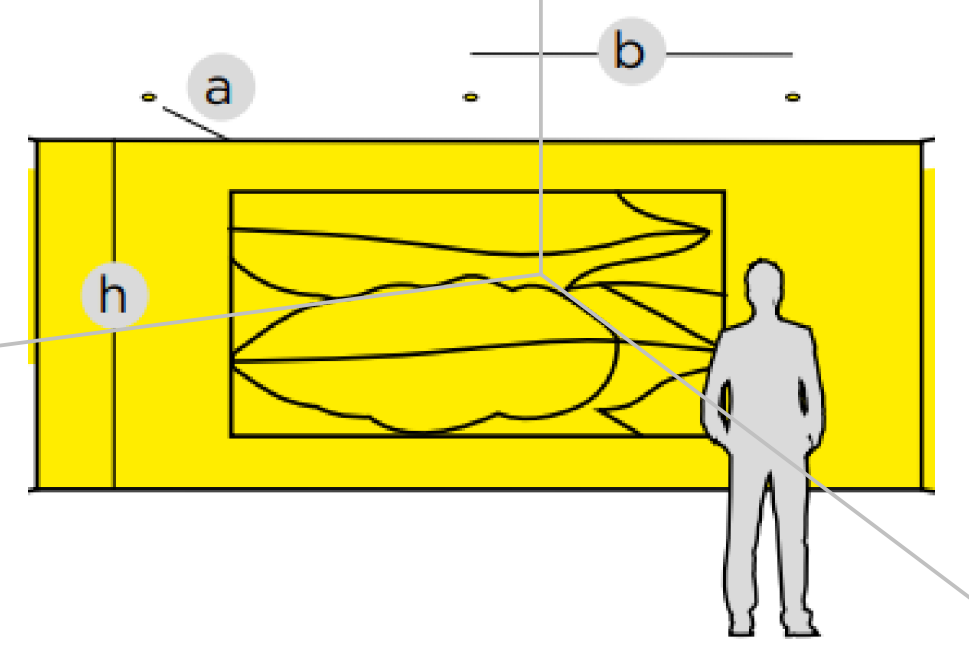


DEEP WASHER MEDIUM-COMPACT-MAX

TOP SIDE

H

40°

A

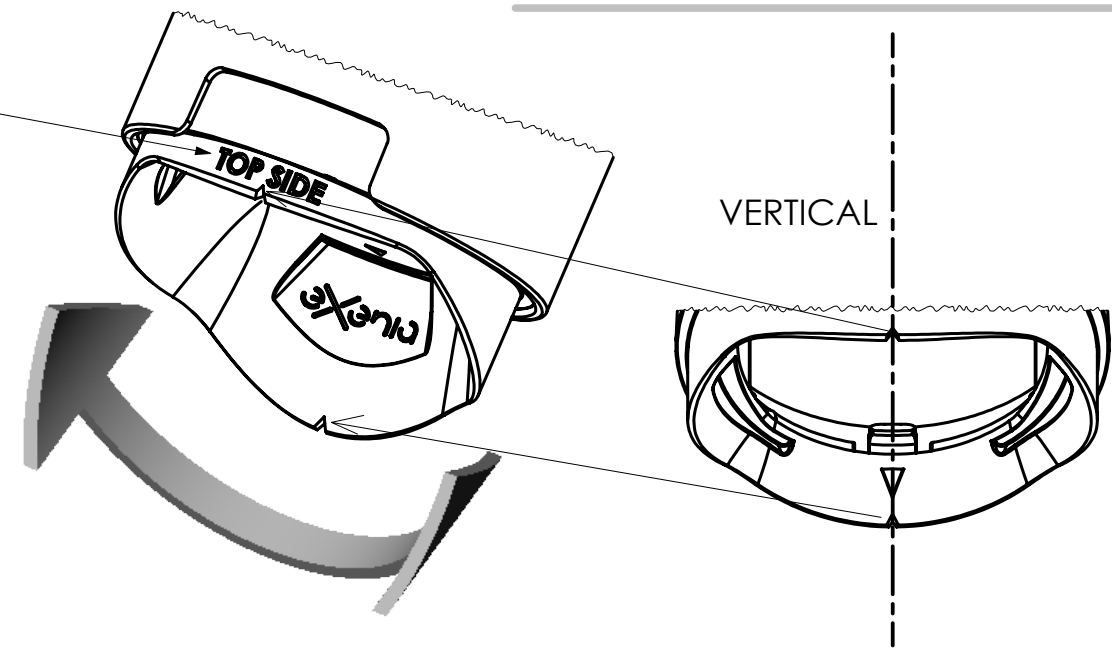

H

A


B

C

Hx0,3	Ax1,3	Bx0,5
-------	-------	-------

C

B




A


B

B


C

H

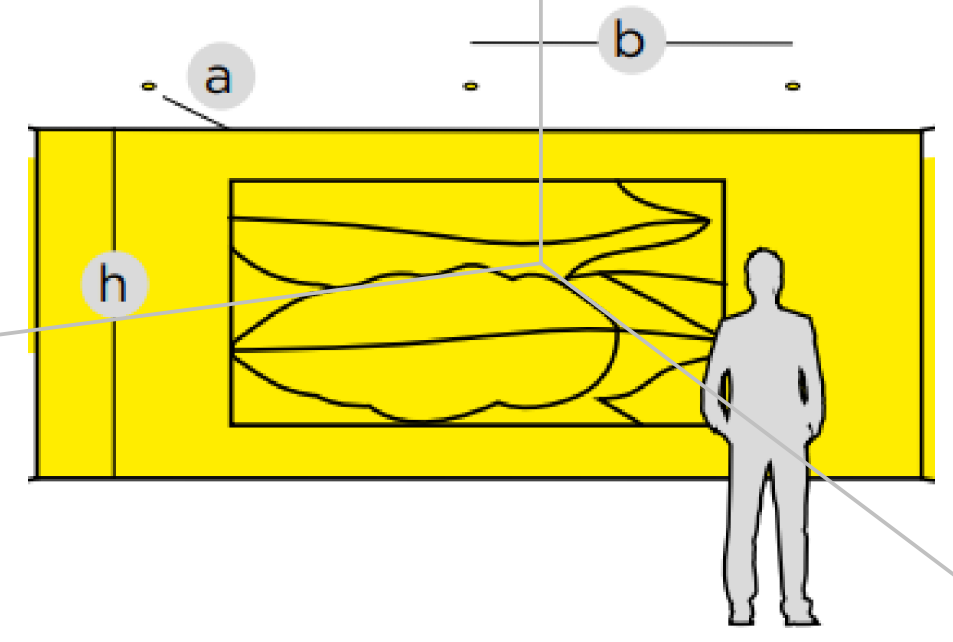

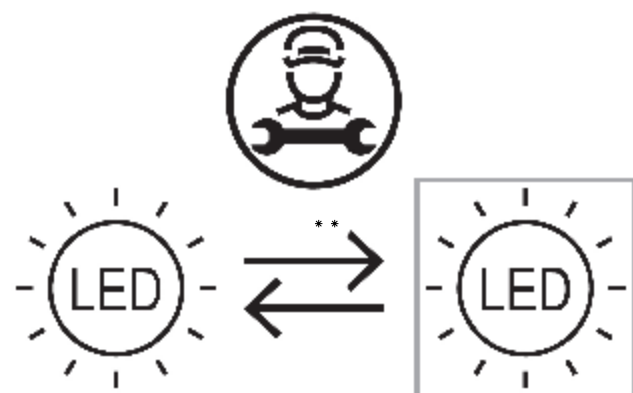

I: LA SOSTITUZIONE DELLA SORGENTE LUMINOSA E DELL'UNITA' DI ALIMENTAZIONE SEPARATA, PUO' ESSERE ESEGUITA SOLO FACENDO RIENTRARE IL PRODOTTO IN EXENIA O DA SUO CENTRO DI ASSISTENZA AUTORIZZATO.

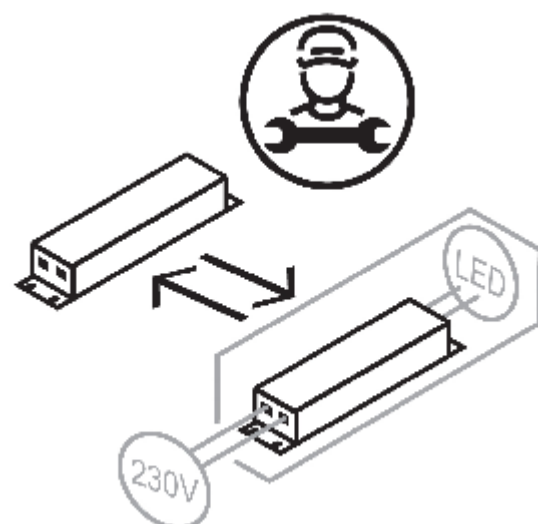

GB: THE LIGHT SOURCE AND THE SEPARATE CONTROL GEARS, CAN BE DONE ONLY TO RETURNED THE PRODUCT IN EXENIA OR FROM ITS AUTHORIZED SERVICE CENTRE.

ENERGY CLASS REF.
NS
CRI92 3500K

IT: Questo prodotto contiene una sorgente luminosa di classe di efficienza energetica F
GB: This product contains a light source of energy efficiency class F
F: Ce produit contient une source lumineuse de classe d'efficacité énergétique F
D: Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F
E: Este producto contiene una fuente luminosa de la clase de eficiencia energetica F

ENERGY CLASS REF.
VN
CRI92 3500K

IT: Questo prodotto contiene una sorgente luminosa di classe di efficienza energetica F
GB: This product contains a light source of energy efficiency class F
F: Ce produit contient une source lumineuse de classe d'efficacité énergétique F
D: Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F
E: Este producto contiene una fuente luminosa de la clase de eficiencia energetica F

MINI - SMALL

ENERGY CLASS REF.
SP-NF-FL
CRI92 3000K

IT: Questo prodotto contiene una sorgente luminosa di classe di efficienza energetica F
GB: This product contains a light source of energy efficiency class F
F: Ce produit contient une source lumineuse de classe d'efficacité énergétique F
D: Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F
E: Este producto contiene una fuente luminosa de la clase de eficiencia energetica F

ENERGY CLASS REF.
SP-NF-FL
CRI98 2700K/3000K

IT: Questo prodotto contiene una sorgente luminosa di classe di efficienza energetica G
GB: This product contains a light source of energy efficiency class G
F: Ce produit contient une source lumineuse de classe d'efficacité énergétique G
D: Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G
E: Este producto contiene una fuente luminosa de la clase de eficiencia energetica G

ENERGY CLASS REF.
SP-NF-FL
CRI98 4000K

IT: Questo prodotto contiene una sorgente luminosa di classe di efficienza energetica F
GB: This product contains a light source of energy efficiency class F
F: Ce produit contient une source lumineuse de classe d'efficacité énergétique F
D: Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F
E: Este producto contiene una fuente luminosa de la clase de eficiencia energetica F

ENERGY CLASS REF.
NS
CRI92 3000K

IT: Questo prodotto contiene una sorgente luminosa di classe di efficienza energetica G
GB: This product contains a light source of energy efficiency class G
F: Ce produit contient une source lumineuse de classe d'efficacité énergétique G
D: Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G
E: Este producto contiene una fuente luminosa de la clase de eficiencia energetica G

ENERGY CLASS REF.
VN
CRI92 2700K/3000K

IT: Questo prodotto contiene una sorgente luminosa di classe di efficienza energetica G
GB: This product contains a light source of energy efficiency class G
F: Ce produit contient une source lumineuse de classe d'efficacité énergétique G
D: Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G
E: Este producto contiene una fuente luminosa de la clase de eficiencia energetica G

ENERGY CLASS REF.
VN
CRI92 4000K

IT: Questo prodotto contiene una sorgente luminosa di classe di efficienza energetica F
GB: This product contains a light source of energy efficiency class F
F: Ce produit contient une source lumineuse de classe d'efficacité énergétique F
D: Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F
E: Este producto contiene una fuente luminosa de la clase de eficiencia energetica F

