

COVE LIGHTING







First of all efficiency

Metrix is the 'Naked' version of the high-performance linear concept. Minimal in its essence, it is a specialist in pure light projection offering precise and homogeneous symmetrical beams and complimentary wall washer. With outputs of 140 lumen/W and always low UGR factors, it is truly a specialist tool for advanced professional design.




Ecosizing

Nothing is by chance, Metrix is conceived and designed to be the ideal tool for highly sustainable projects.

In addition to its very high yields and small dimensions, we also strip back the raw components required while optimising the sizes available to give the least material waste during production.

This allows us to save energy and material, before, during and after the complete life cycle of the product.







1080 mm



720 mm



360 mm

Lengths

The linear units, made of extruded aluminum and powered by current by remoted drivers, are available in four different lengths defined by an "Ecosizing" philosophy for the maximum avoidance of material waste to obtain a more ecologically sustainable product.



1440 mm



Flood **30°** Wide Flood **50°**

Microflat optics


The new specific optical systems guarantee high efficiency and very high beam precision in contained shapes.

Dedicated to professional design, they are available in two symmetrical beam openings, one with high transversal diffusion and one wall washer.





Desk **60°**x **35°**



Applications

The complete accessories allow installations to ceilings, cornices, or onto a shelf and are fully adjustable.



Wall bracket


Bracket with snap button on the back of the extrusion, for fixed installation on a flat surface, with a 90° orientation.



Adjustable joint


Accessory that can be snapped onto the back of the extrusion. It allows surface fixing and gradual orientation with aiming lock.


Made of PA12, it is flexible and resistant to stress and impacts.

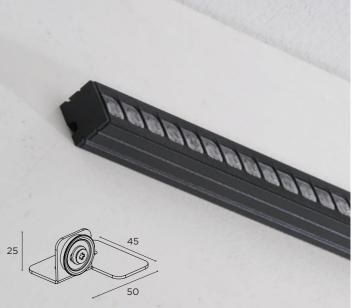



Ceiling button


Snap fastening button for direct installation on a flat surface.

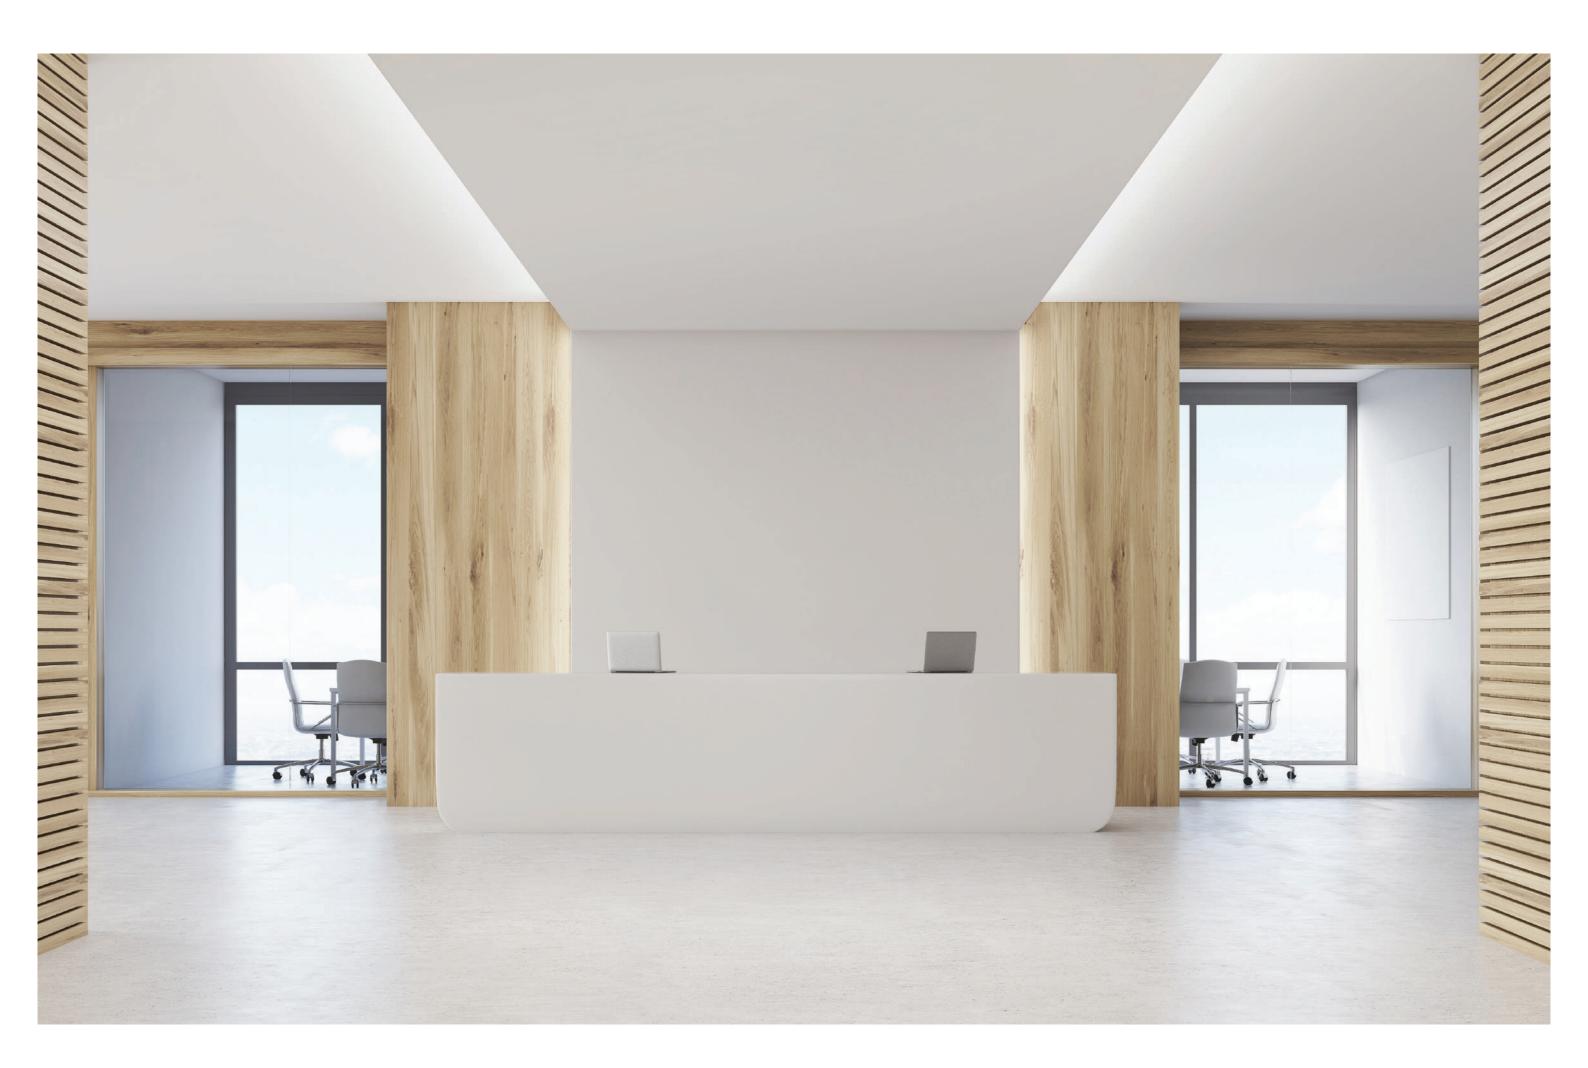


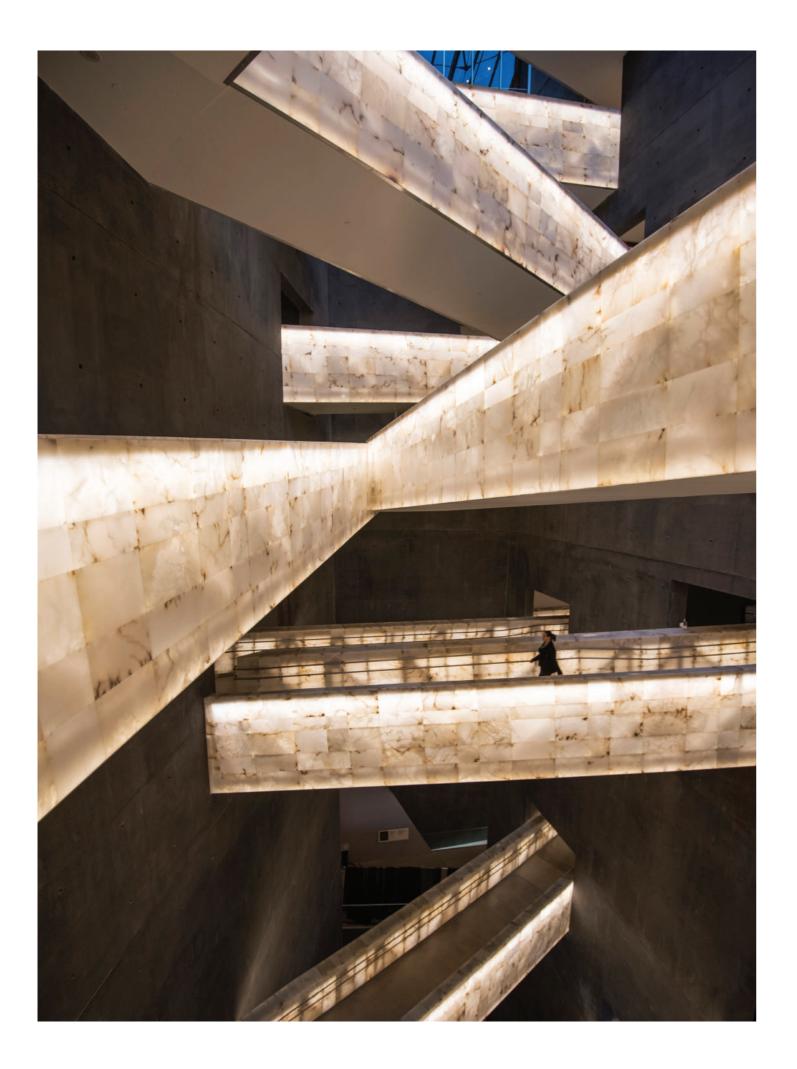


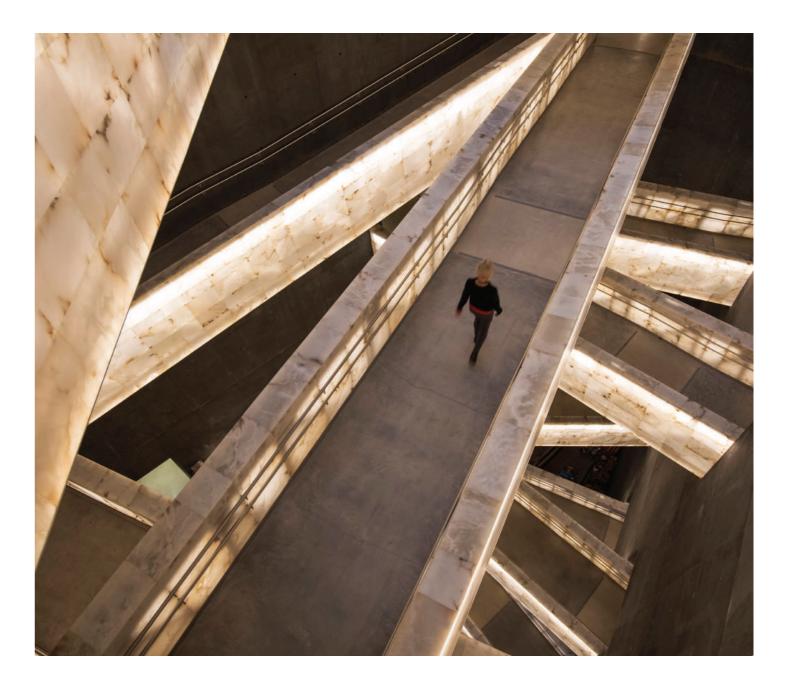

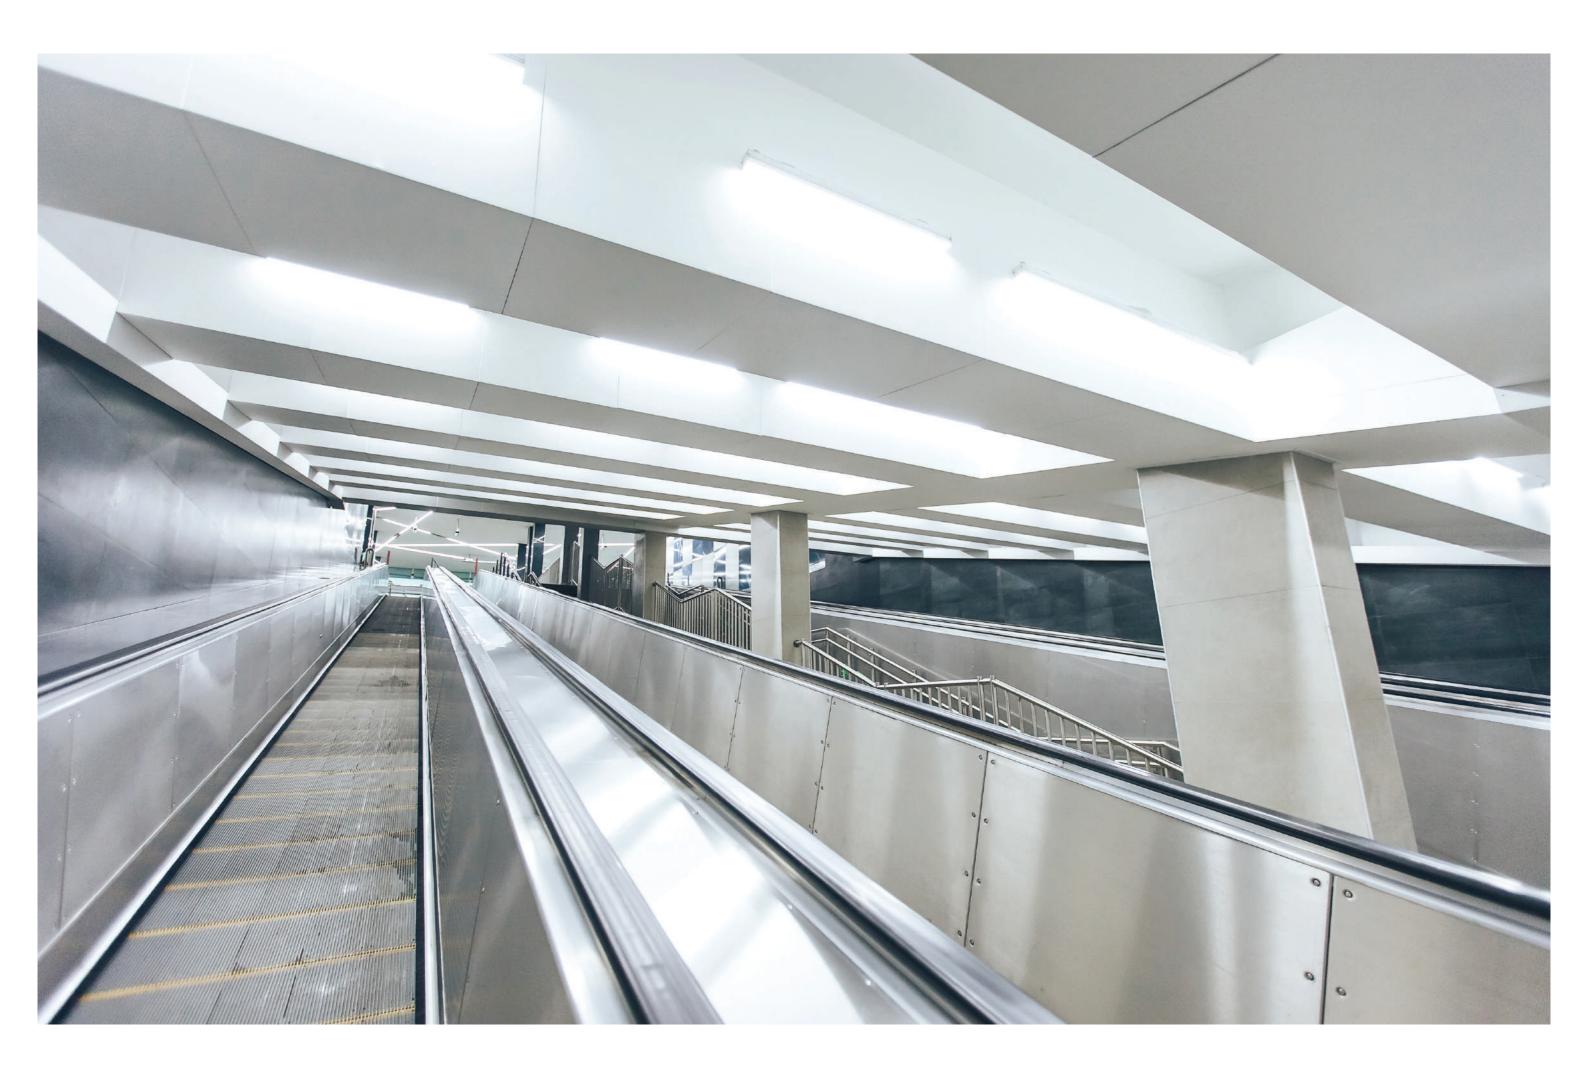


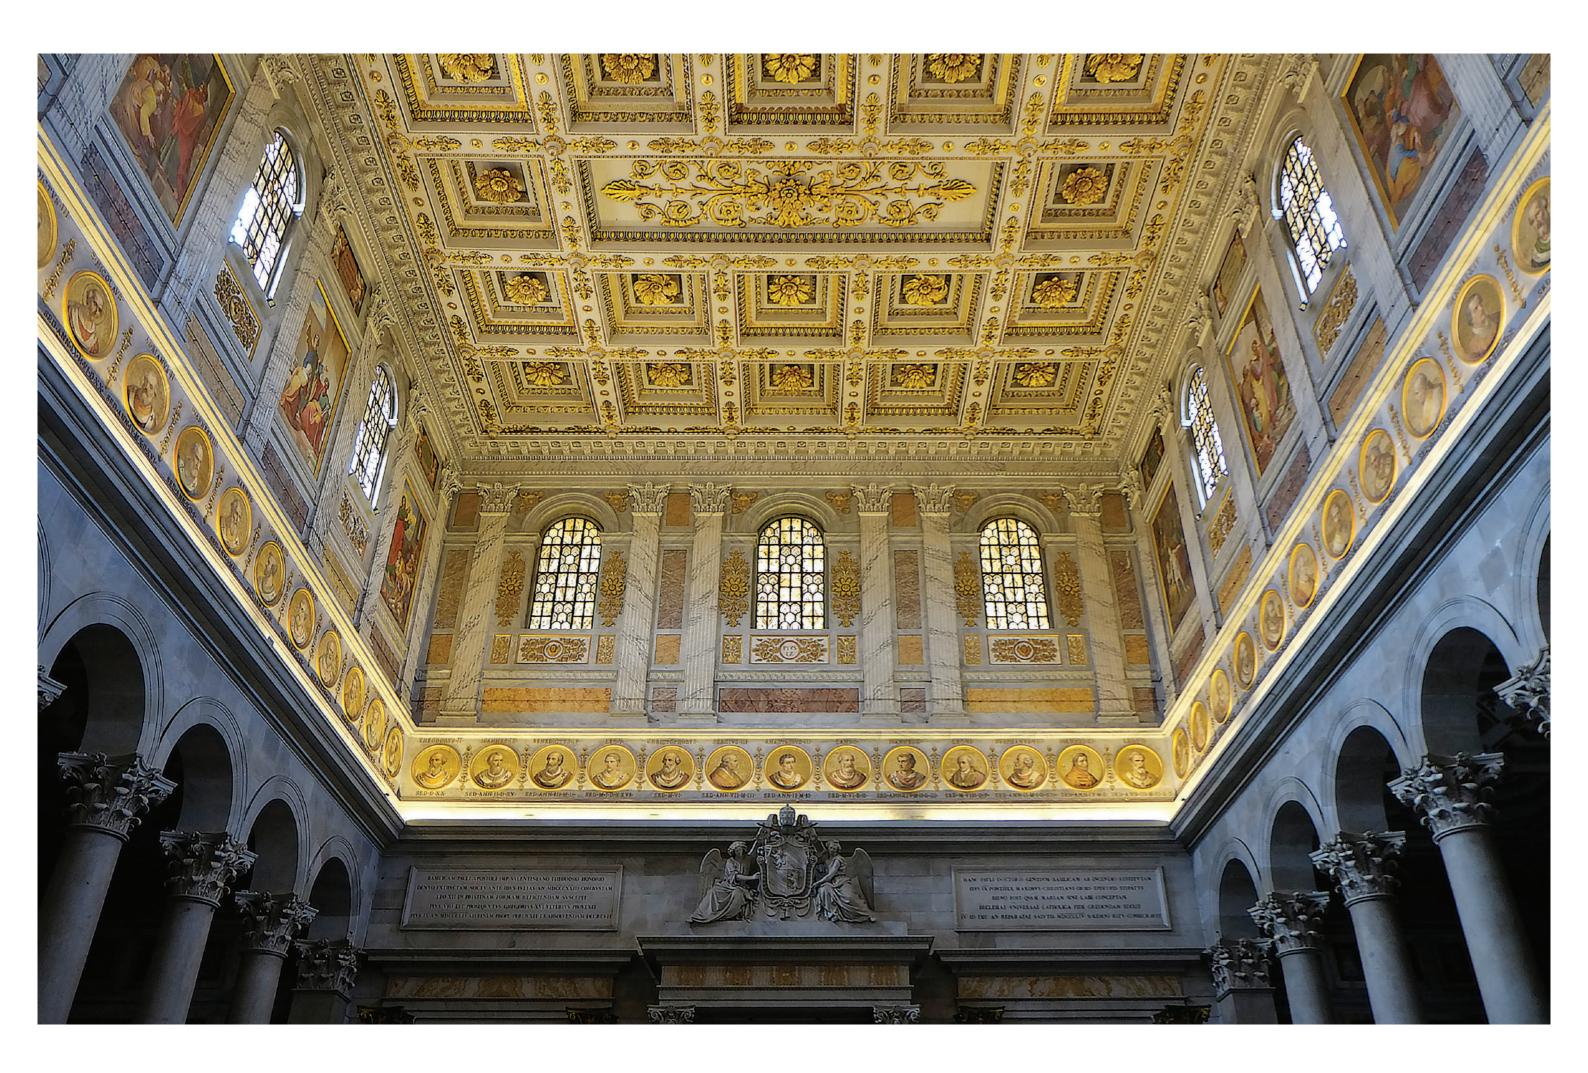

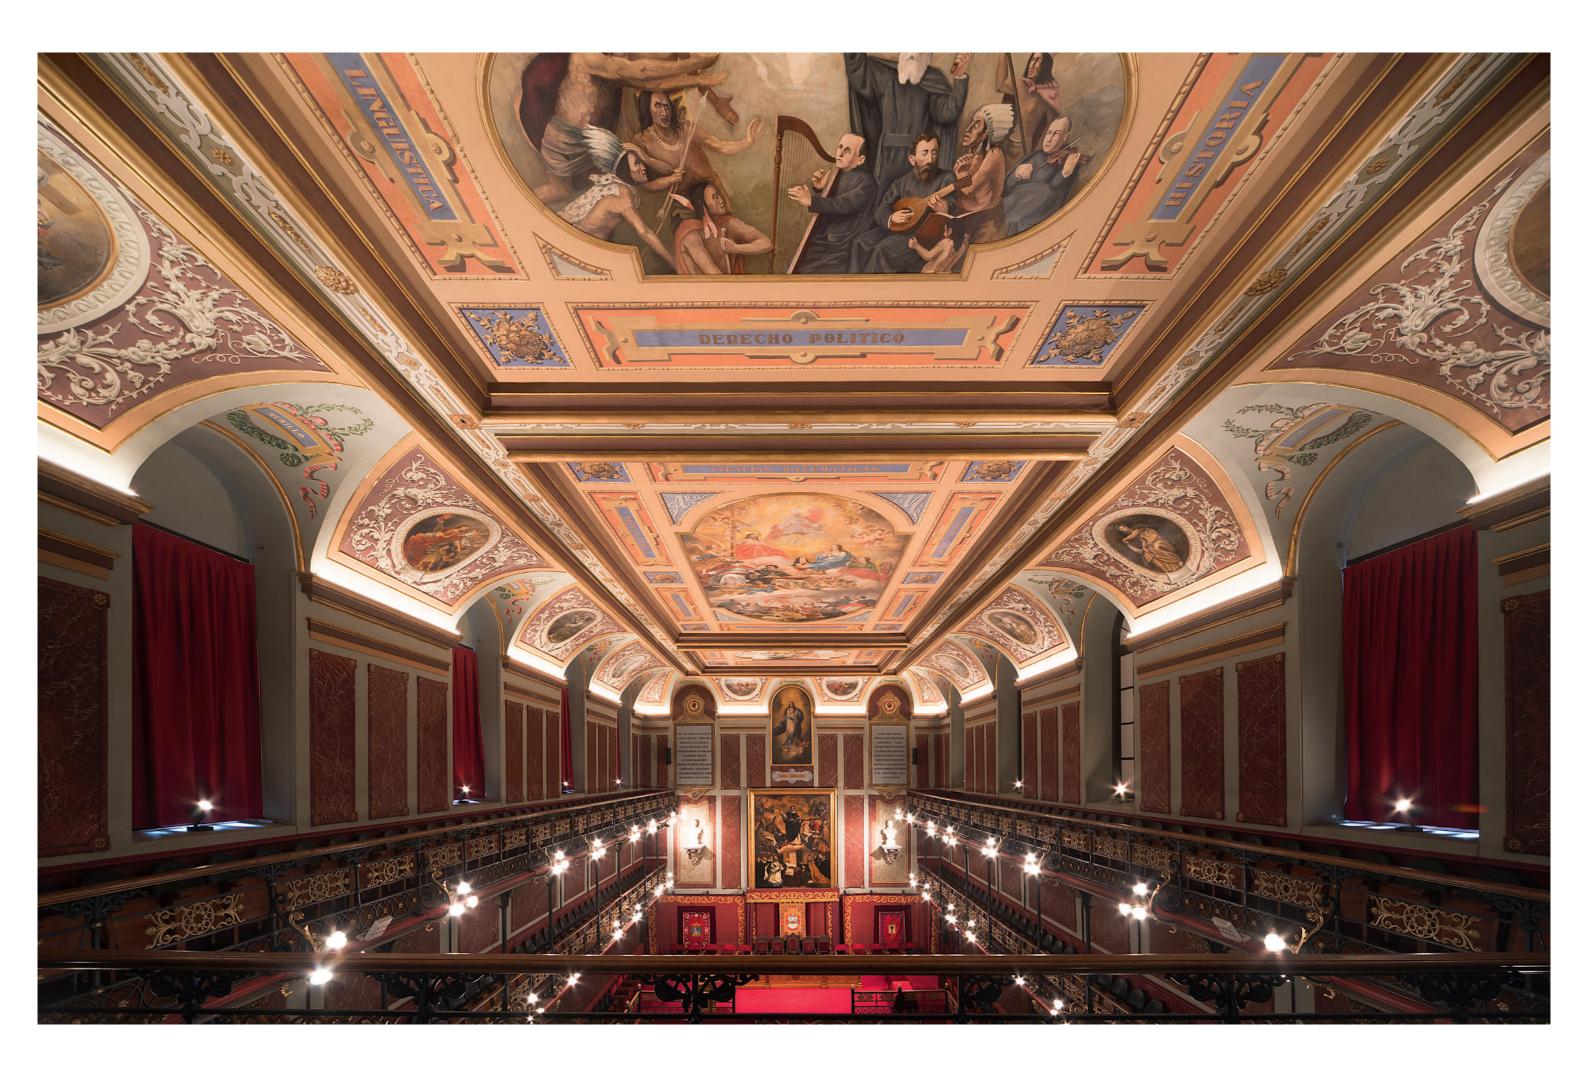


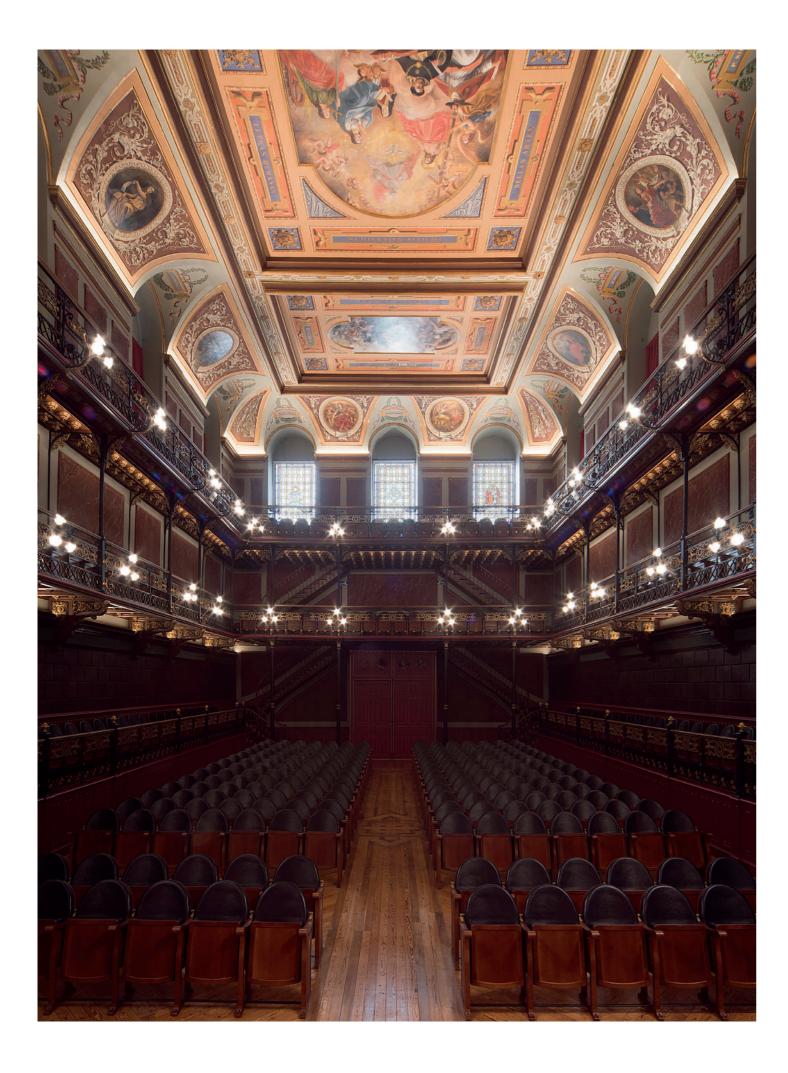


SUMMARY SHEET

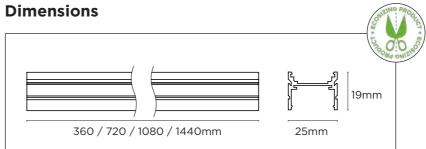


Versions




Optics



Accessories



Finishes



Outputs (Depending on optics and dimensions)

50mA - 1300lm/m 100mA - 2600lm/m 150mA - 3800lm/m

Controls

- ON/OFF
- 1-10V
- DALI
- PUSH
- CASAMBI
- PHASE CUT

Colour temperature



MacAdam

• 3 STEP

Colour rendering

- CRI 92
- CRI 98





exenia.eu